



## REPAIRING ROTTEN WINDOWS

The Desowood Repair System allows the repair of rotten windows at a fraction of the cost of replacement.



Desowood SAP is applied after the removal of wood decay.

The repair is completed with Desowood RAP.



Window affected by wood decay.



Wood decay at joints and cill require replacement.



Use the Desowood grinding machine to remove the decay.



Apply Desowood SAP / RAP to complete the repair.



Complete all the repairs on the window.



The repaired window is painted.

## THE DESOWOOD® REPAIR SYSTEM

- ❖ Desowood SAP and Desowood RAP for repairing rotten wood.



### Mixing Desowood RAP



Desowood incorporates a mix colour control to ensure that the two components are mixed correctly in the right proportion.

- ❖ Check that the moisture content of the wood is below 18% before the application of Desowood SAP / RAP.
- ❖ Dispense the quantity of Desowood RAP required.
- ❖ Thoroughly mix the Desowood RAP.
- ❖ Mix until no blue / green colour is present.



### 'The characteristics of Desowood RAP is just like wood'

- ❖ Desowood RAP is elastic and planes like wood.
- ❖ Excellent adhesion to wood.
- ❖ The picture illustrates the high bond strength between the wood and the resin.
- ❖ Desowood RAP can be machined, sawn, drilled, nailed and screwed like wood.

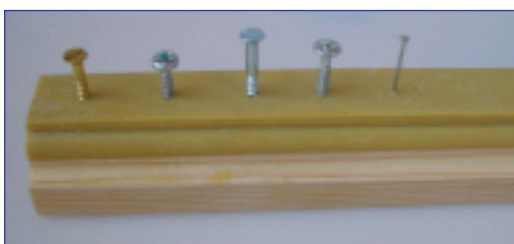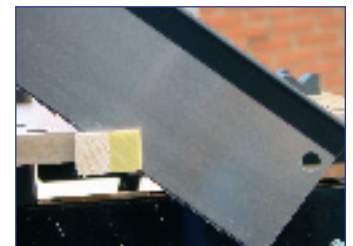



# Durable Effective System

## How to start using the DESOWOOD® REPAIR SYSTEM

If you have any questions about buying the Desowood Products and Tools – Please feel free to contact DESOFIL (U.K) Ltd Head Office or your Area Desowood Distributor.

### Set-up cost - Option 1

For using the Desowood SAP / RAP system for traditional methods of repair.

#### Application Tools – Starter Pack

Dispensing and mixing tools for Desowood SAP / RAP

- ❖ Dispensing gun
- ❖ Mixing Plate
- ❖ Mixing Cup and Brush
- ❖ Application Knives
- ❖ Nitrile rubber gloves (two pairs).

£54.40



- ❖ Remember to remove all the rotten wood before repairing.

❖ Desowood SAP £15.38

❖ Desowood RAP  
❖ Standard Size £17.30  
❖ Trade Size £34.60



### Set-up cost - Option 2

#### Desowood Grinding machine

- ❖ A high speed tool for cutting out decayed wood and conservation joints
- ❖ Ideal for insitu removal of wood decay
- ❖ Available in 240v and 110v

£180.95



#### Desowood Wipes

- ❖ For cleaning hands during and after working with Desowood Epoxy Resin Products
- ❖ For cleaning tools after work

£7.95



#### Cutters

- ❖ Straight cutter – for conservation joints. 4mm. £11.25
- ❖ Round cutter – for removal of wood decay. 4.75mm £11.25



#### Desowood Scraper

- ❖ For removal of paint
- ❖ For removal of Desowood RAP
- ❖ Replaceable scraper blades

£9.95



#### Application Tools – Starter Pack

- ❖ Dispensing and mixing tools for Desowood SAP / RAP
- ❖ Dispensing gun
- ❖ Mixing Plate
- ❖ Mixing cup and Brush
- ❖ Application knives
- ❖ Nitrile rubber Gloves (two pairs)

£54.40



#### Perspex Strips

500mm Lengths in pack of 10  
For use as 'formers' or shuttering for wood repairs with

£15.50



**Total: £291.25**

All prices are exclusive of VAT and carriage.  
Prices quoted are correct at the time of printing – please check the current price.

For further information please contact:  
DESOFIL (U.K) Ltd  
Head Office, Unit 5, Venture Court,  
7 Gosforth Close, Middlefield Industrial Estate,  
Sandy,  
Bedfordshire, SG19 1RB  
Tel: 01767 682446 Fax: 01767 683898  
Email: sales@desofil-uk.com  
Web-site: www.DESOFIL-UK.COM

Your Area Desowood Distributor:



**DESOFIL**

## **THE DESOWOOD® REPAIR SYSTEM -**

**An Ideal Timber Repair System for Painters & Decorators.  
Before you paint – you can use the Desowood repair system  
for all your joinery repairs.**

### **Traditional Timber Splicing**

You can make the traditional splice last longer with the Desowood repair system.

- ❖ Cut – out all the rotten wood.
- ❖ Apply Desowood SAP / RAP to all contact surfaces.
- ❖ Bed your timber splice on Desowood SAP / RAP.



### **The Desowood DAP - Elastic Glazing System**

A durable alternative to linseed oil putty.

- ❖ Linseed oil putty is inherently brittle and causes paint failure and wood decay.
- ❖ The Desowood DAP glazing System.
- ❖ Desowood DAP is applied using the applicator shown.
- ❖ A cured sample Desowood DAP illustrating the elasticity of the Product.
- ❖ Desowood DAP can be coated with a paint or wood stain.



Uses – Durable alternative to putty.  
Bedding in glazing beads.  
Perimeter Sealing.  
For use on timber & metal windows.

**A tube of Desowood DAP = £8.65**  
**Desowood applicator = £1.50**  
**Desowood dispensing gun = £30.80**

